



Product designation  
Product type designation  
Motor type

Soft Starter  
ADXL  
Asynchronous  
three phase

**Electrical features**

Supplies voltage

Type of system		Three phase
Rated supply voltage	V	208...600VAC
auxiliary supply voltage (Us)		100...240VAC
Rated frequency	Hz	50/60

Rated starter current Ie	A	30
--------------------------	---	----

Rated motor power

IEC ratings (T≤40°C)

230VAC	kW	7.5
400VAC	kW	15
500VAC	KW	18.5

UL ratings (T≤40°C)

220-240VAC	HP	10
380-415VAC	HP	15
440-480VAC	HP	20
550-600VAC	HP	25

Number of controlled phases	Nr.	2
-----------------------------	-----	---

Built-in bypass		Yes
-----------------	--	-----

Cooling System		Natural or forced (optional)
----------------	--	------------------------------

Rated insulation voltage Ui	V	600
-----------------------------	---	-----

**Programming interface**

Display		Backlit icon LCD display
---------	--	--------------------------

Programming with NFC technology		Yes
---------------------------------	--	-----

Optical port		Yes
--------------	--	-----

**Startup and stop settings**

Startup method		Torque ramp with current limit, Voltage ramp with current limit, Constant torque with current limit
----------------	--	---

Stop method		Torque ramp, voltage ramp, free-wheel stop
-------------	--	--

**Protections**

Auxiliary supply protection		Voltage too low
-----------------------------	--	-----------------

Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, cooling fan fault, maintenance request

Functions	
Built-in bypass	Yes
Built-in display and keypad	Yes
Languages	6
View measurements	Yes
Torque control	Yes
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	No
Motor overload electronic protection	Yes
Motor protection PTC input	Yes
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	3
Analog inputs	0
Digital outputs	3
Analog output	0
Optical port for programming	Yes
Event log	Yes
Motor hour counter	Yes
Startup counter	Yes

Clock calendar	Yes
Remote external keypad	No

**Input and Output**

Digital inputs			
	Number of digital input	Nr.	3
	Digital input type		2 input with dry contact + 1 input with dry contact or PTC (configurable) Programmable (motor start, motor stop, freewheel stop, motor preheating, commands lock, alarms inhibition, thermal status reset, keyboard lock, motor selection, user alarm, command)
	Digital input functions		

Digital outputs			
	Number of digital output	Nr.	3
	Digital output arrangement		2 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 2 x 1NO contacts: 3A 250VAC - 3A 30VDC 1 x C/O contact: NO contact 5A 250VAC - 5A 30VDC; NC contact 3A 250VAC - 3A 30VDC Programmable (line contactor, run, global alarm, limits, remote variable, alarm Axx, user alarm Axx, OFF)
	Digital output functions		

**Ambient conditions**

Temperature			
	Operating temperature		
	min	°C	-20
	max	°C	+60°C (with current derating >40°C of 0.5%/°C)
	Storage temperature		
	min	°C	-30
	max	°C	+80

Max altitude	m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity	%	<80%
Pollution degree		2
Installation category		III


**Housing**

Mounting		Screw-fixing or 35mm DIN rail with optional accessory EXP8003
IP degree of protection		IP00

Dimensions (W x H x D)	mm	75 x 218 x 171.5
------------------------	----	------------------

Weight	Kg	2.1
--------	----	-----

**Dimensions**

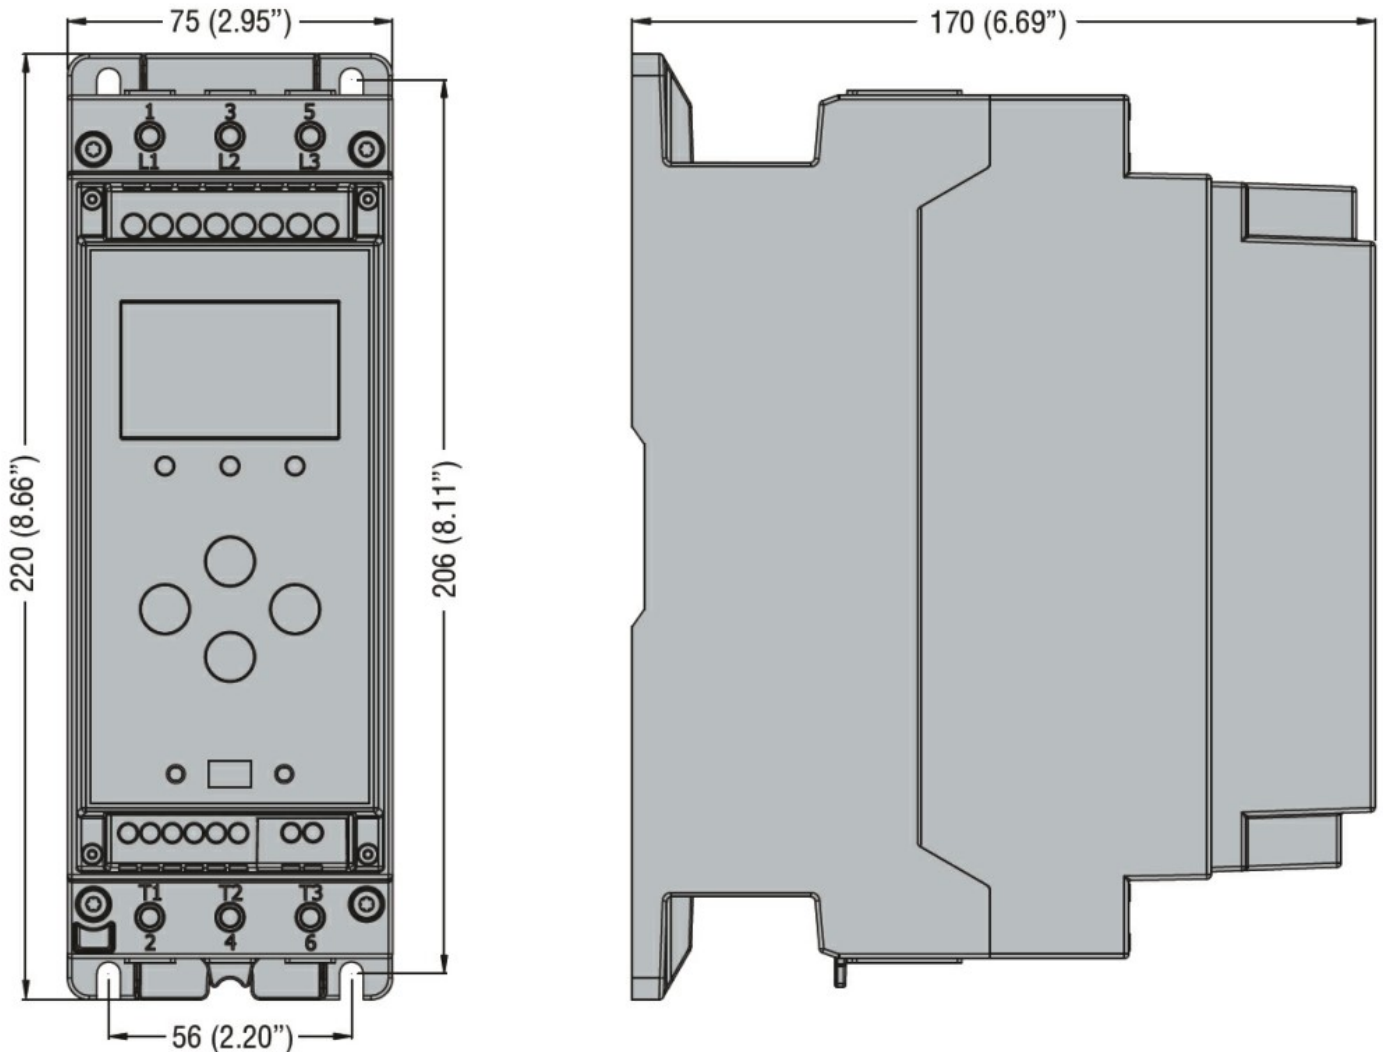

**Certifications and compliance**

**Compliance**

CSA C22.2 n° 14  
IEC/EN 60947-1  
IEC/EN 60947-4-2

---

UL508

---

Certificates

cULus

---

EAC

---

RCM

---

ETIM classification

ETIM 8.0

EC000640 - Soft  
starter